




PRO TIP

Recommend for use with a 6-foot minimum lance equipped with dead-man switch.

Only use threaded connections (rather than quick-connects) to ensure water stream remains stable and intact for long-distance cleaning.



KEY FEATURES

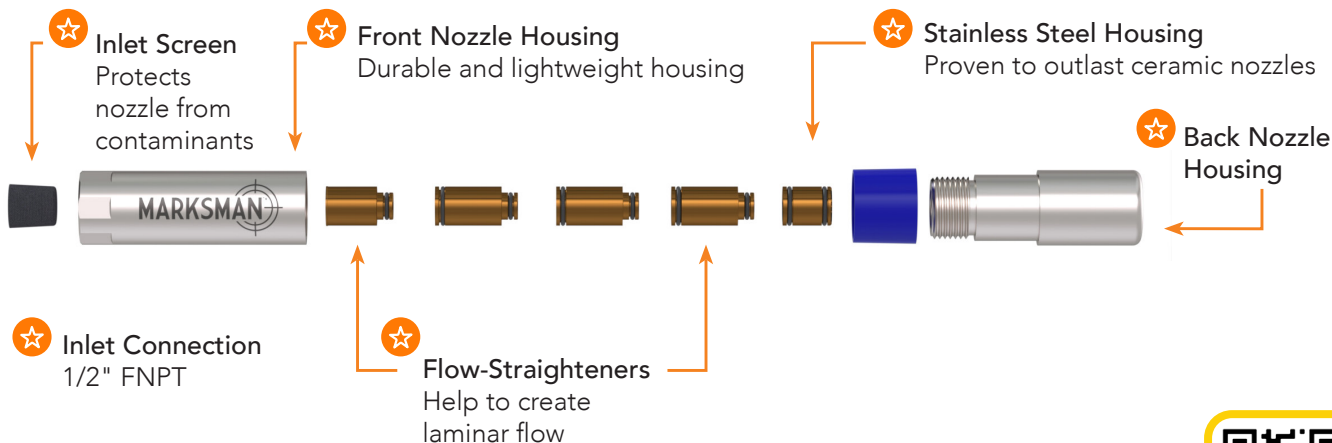

CHECK OUT OUR VIDEO LIBRARY!



DOME INLET SCREENS

10 pack



Part Number: 20022297



OUTFIT YOUR RIG

Hydro-Excavation or Municipal-focused demo boxes are available to fully outfit your rig. Email us for more info.

hello@hydraflexinc.com

NOZZLE SIZE	NOZZLE PART NUMBER	FLOW RATE CHART				
		@ 500 PSI (34 bar)	@ 1,000 PSI (70 Bar)	@ 1,500 PSI (103 Bar)	@ 2,000 PSI (138 Bar)	@ 2,500 PSI (172 Bar)
12.0	20022431	4.8 GPM (18.2 LPM)	6.8 GPM (25.7 LPM)	8.3 GPM (31.4 LPM)	9.6 GPM (36.2 LPM)	10.8 GPM (40.9 LPM)
15.0	20022432	5.8 GPM (22.0 LPM)	8.2 GPM (31.0 LPM)	10.0 GPM (37.9 LPM)	11.6 GPM (43.9 LPM)	13.0 GPM (49.2 LPM)
20.0	20022433	7.8 GPM (29.5 LPM)	11.0 GPM (41.6 LPM)	13.5 GPM (51.1 LPM)	15.6 GPM (59.1 LPM)	17.4 GPM (65.9 LPM)

CLEAN LIFT STATIONS MORE FREQUENTLY
THANKS TO EASE OF USE

